
parki Ltd.

mala
mp.lv


Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL

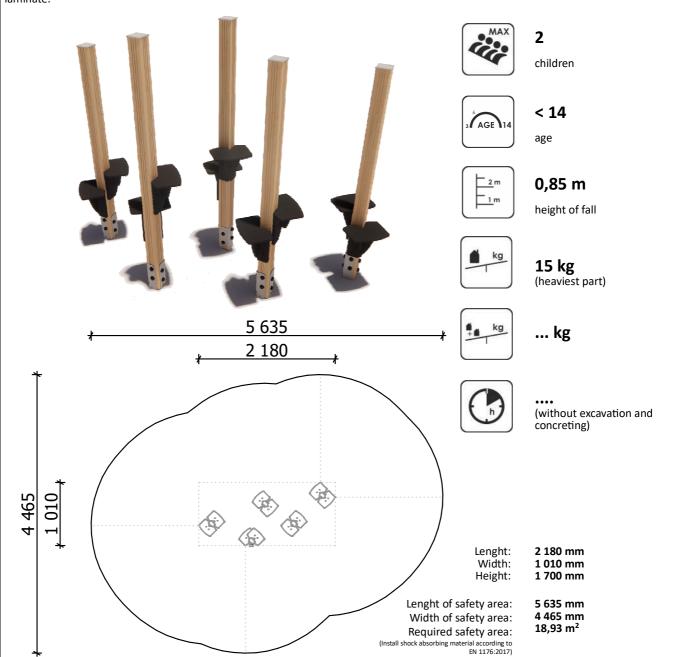


Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessable for maintenance.

Equipment safety checkings must be performend once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.

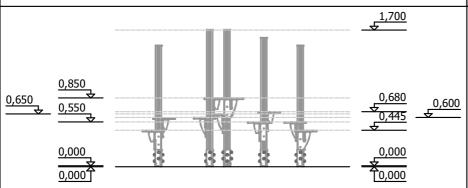

According to EN 1176-1:2017



Transportation:

1 (one) palette:

2 100 x 1 000 x 500 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.



