FIVE130
PRODUCT DATA SHEET

Jūrmalas Mežaparki Ltd.
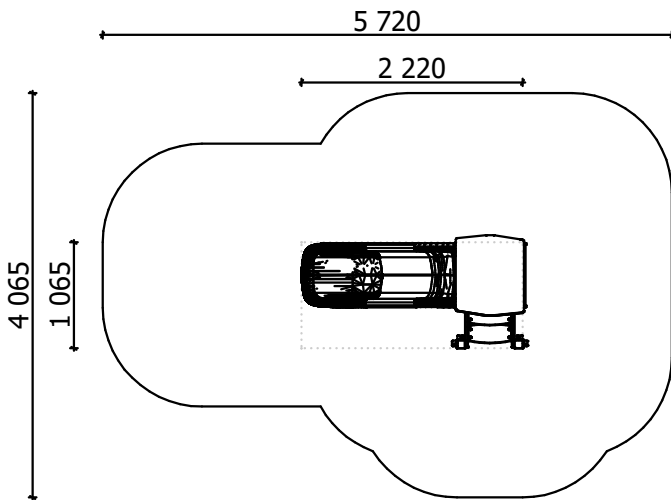1 Garkalnes street, Jurmala
+371 299 006 03, www.jmp.lv

JMP

Construction is made from high pressure impregnated wood, stainless and galvanized steel metal, HPL laminate.

MAX 3 children

< 6 age

0,80 m height of fall

18 kg (heaviest part)

... kg

3 h (without excavation and concreting)

5 720

2 220

4 065

1 065

Lenght: **2 220 mm**
Width: **1 065 mm**
Height: **2 355 mm**

Lenght of safety area: **5 720 mm**
Width of safety area: **4 065 mm**
Required safety area: **18,33 m²**

(Install shock absorbing material according to EN 1176:2017)
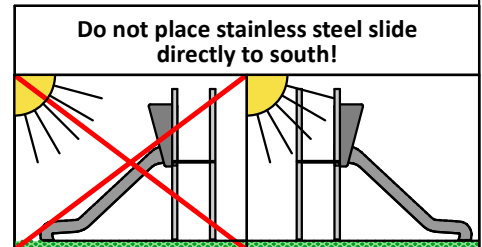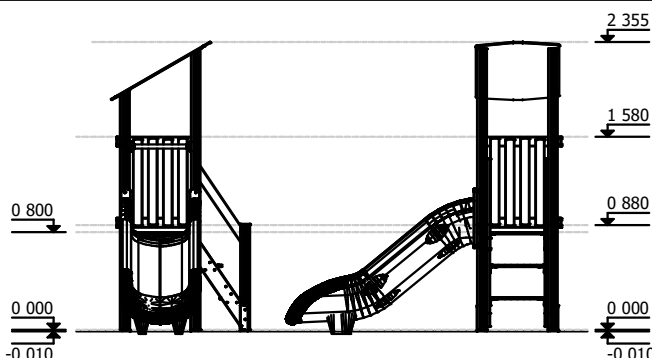
Do not place stainless steel slide directly to south!

Foundation should be accessable for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performend once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.

560
min 490
min 200
R100.0
400

1 - Post
2 - Playing surface
3 - Foundation
4 - Basic level mark
5 - Top of foundation

2 355

1 580

0 800

0 000
-0 010

0 880

0 000
-0 010

Transportation:

1 (one) palette:
2 800 x 1 000 x 500 mm

Spare parts:
All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1:2017

Manufactured according:
07.11.2019.