Gray-C34

PRODUCT DATASHEET

Jūrmalas Mežaparki Ltd.
1 Garkalnes street, Jurmala
+371 299 006 03, www.jmp.lv

Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.



5
children

3-14
age


1,55 m
height of fall

85 kg
(heaviest part)

161,25 kg

5 h
(without excavation and concreting)

90 x 90 x 2220 mm
overall dimensions
of the largest part

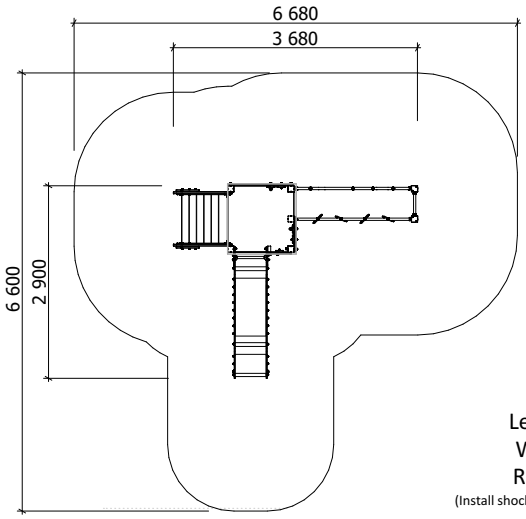


Lenght: **3 680 mm**
Width: **2 900 mm**
Height: **2 200 mm**

Lenght of safety area: **6 680 mm**
Width of safety area: **6 600 mm**
Required safety area: **30,30 m²**
(Install shock absorbing material according to EN 1176:2017)

Available color's palette



Do not place stainless steel slide directly to south!

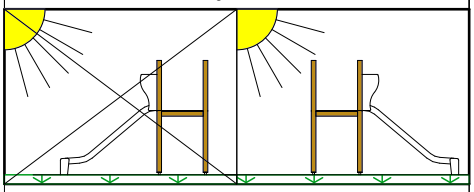



Foundation should be accessable for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performend once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.



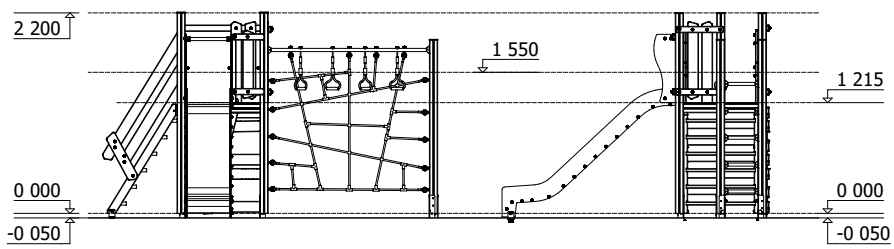

Transportation:

Spare parts:
All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1:2017

Manufactured according:
07.11.2019.

ISO 9001 BUREAU VERITAS Certification