
Gray-CP14 PRODUCT DATASHEET

Jūrmalas Mežaparki Ltd.
1 Garkalnes street, Jurmala
+371 299 006 03, www.jmp.lv

Construction is made from glued wood, stainless and galvanized steel metal, plywood and HPL laminate details.



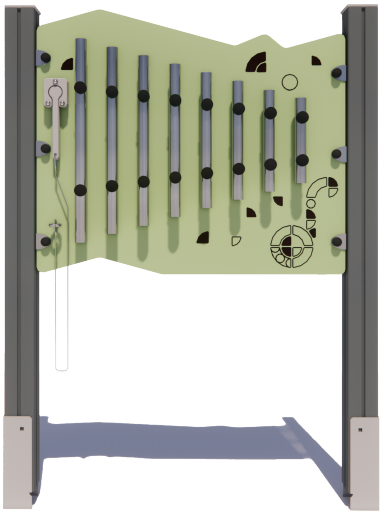

1
children

< 6
age


0,00
free height of fall

10 kg
(heaviest part)

32 kg

4 h
(without excavation and concreting)

90 x 90 x 2220 mm
overall dimensions
of the largest part

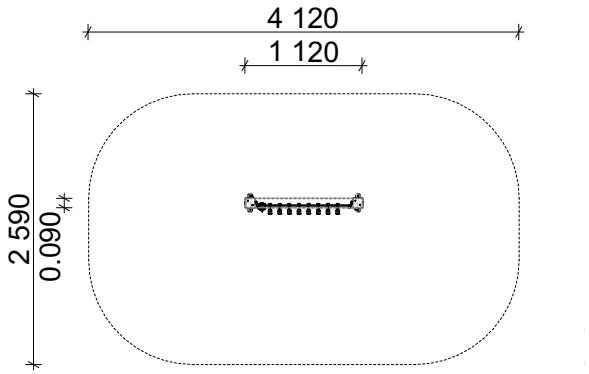


Lenght: **1 120 mm**
Width: **90 mm**
Height: **1 600 mm**


Lenght of safety area: **4 120 mm**
Width of safety area: **2 590 mm**
Required safety area: **9,82 m²**
(Install shock absorbing material according to EN 1176-1)

Available color's palette



Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessable for maintenance.
Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.
Equipment safety checkings must be performend once in a week in high vandalism risk area.
Maintainance is required once in every 3 months, depending on usage.



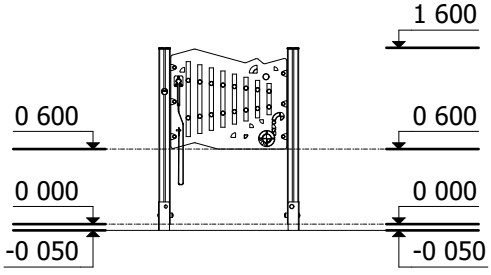

Transportation:

Spare parts:
All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1

Manufactured according:
07.11.2019.