



Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.



**11**  
children




**from 6**  
age



**2,00 m**  
height of fall



**... kg**  
(heaviest part)



**... kg**



**... h**  
(without excavation and  
concreting)




Length: **6 560 mm**  
Width: **6 570 mm**  
Height: **3 000 mm**

Length of safety area: **10 090 mm**  
Width of safety area: **10 080 mm**  
Required safety area: **100 m<sup>2</sup>**

(Install shock absorbing material according to  
EN 1176:2017)

**Do not place tunnel slide directly to south!**


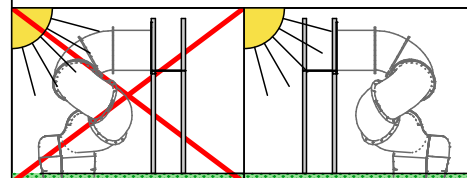


Foundation should be  
accessible for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

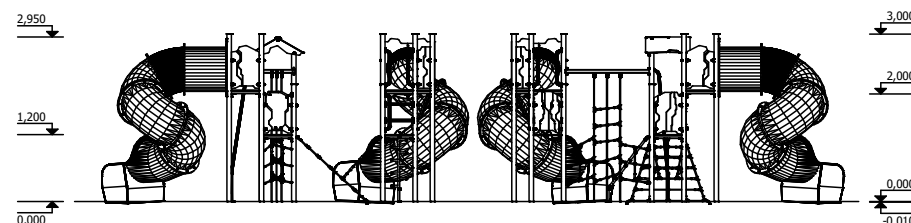

Transportation:

**4 (four) palette:**  
3 000 x 1 000 x 500 mm;  
2 800 x 1 000 x 500 mm;  
3 000 x 1 500 x 2 000 mm (tunnel slide)  
3 000 x 1 500 x 2 000 mm (tunnel slide)

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176:2017

Manufactured  
according:  
07.11.2019.



EN 9100  
BUREAU VERITAS  
Certification

