


Construction is made from high pressure impregnated wood, stainless and galvanized steel metal, rope and HPL laminate.




14
children




6 <
age



1,20 m
height of fall




18 kg
(heaviest part)



... kg



....
(without excavation and
concreting)

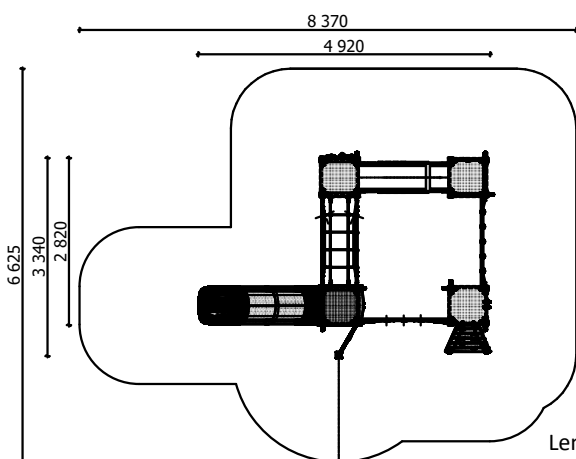


Length: **4 920 mm**
Width: **3 340 mm**
Height: **2 755 mm**


Length of safety area: **8 370 mm**
Width of safety area: **6 625 mm**
Required safety area: **42,00 m²**

(Install shock absorbing material according to
EN 1176:2017)

**Do not place stainless steel slide
directly to south!**

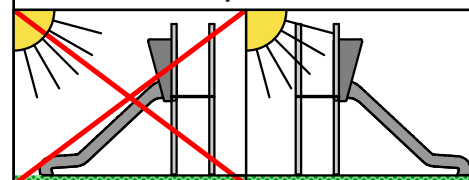


Foundation should be
accessible for maintenance.



Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

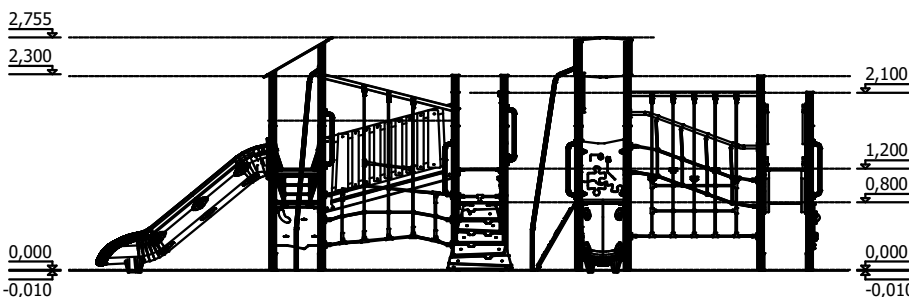

Transportation:

2 (two) palette:
2 800 x 1 000 x 500 mm
2 600 x 1 000 x 500 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176:2017

Manufactured
according:
03.2023.

