

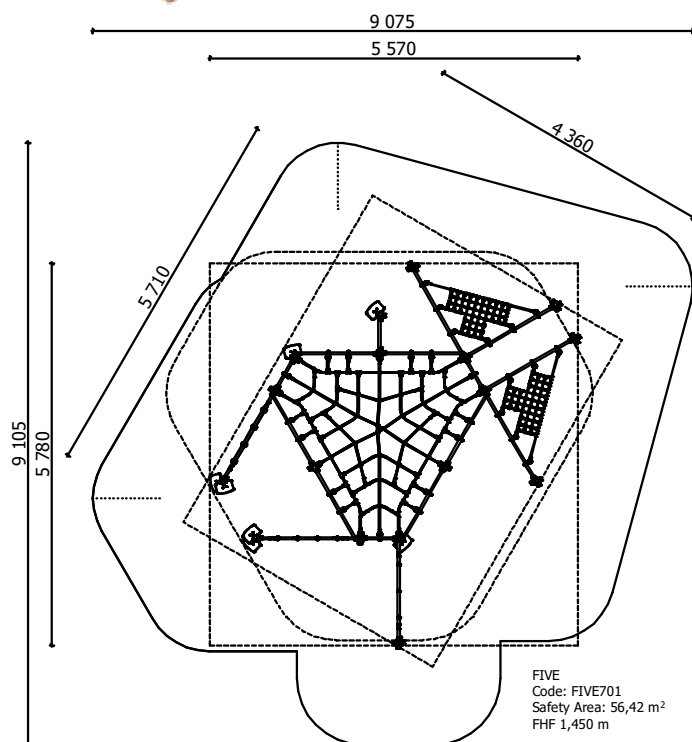



Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate details.

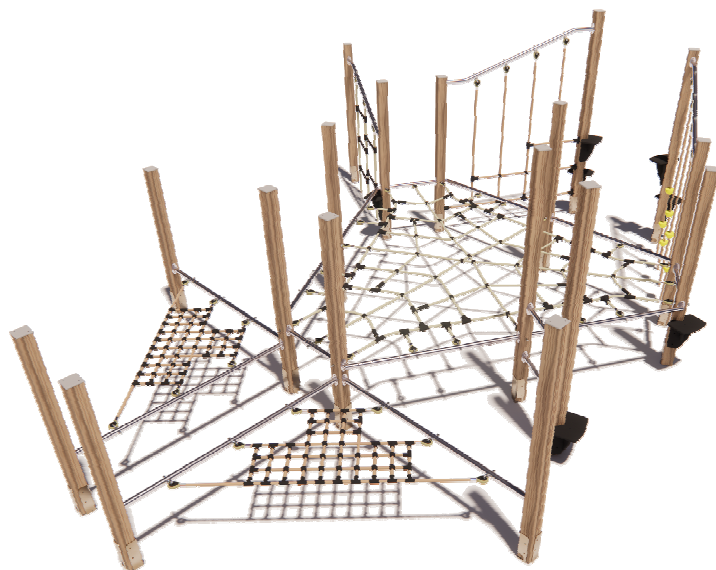


16
children




< 14
age



1,45 m
height of fall




53 kg
(heaviest part)



455 kg



12 h
(without excavation and concreting)



80x80x2100 mm
overall dimensions
of the largest part

Lenght: **5 570 mm**
Width: **5 780 mm**
Height: **2 100 mm**


Lenght of safety area: **9 075 mm**
Width of safety area: **9 105 mm**
Required safety area: **56,42 m²**

(Install shock absorbing material according to EN 1176-1)

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessible for maintenance.

Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.


Equipment safety checkings must be performed once in a week in high vandalism risk area. Maintenance is required once in every 3 months, depending on usage.



Transportation:

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

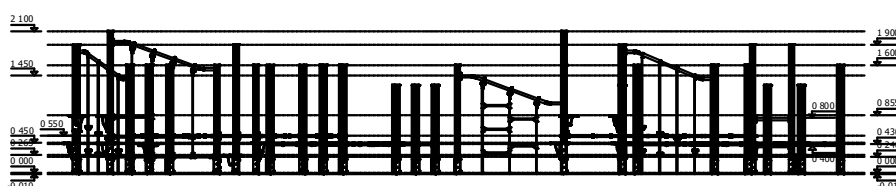

According to EN 1176-1

Manufactured
according:
07.11.2019.

