




Construction is made from galvanized steel metal, rope and HPL laminate or HDPE plastic details.

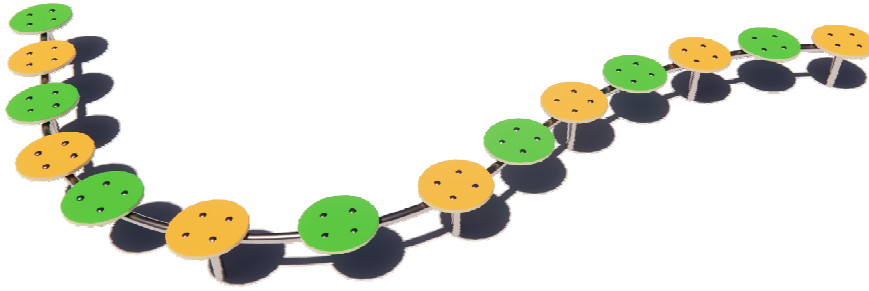


**3 - 14**  
children




**> 3**  
age



**0,275 m**  
height of fall




**29 kg**  
(heaviest part)



**53 kg**



**2 h**  
(without excavation and concreting)

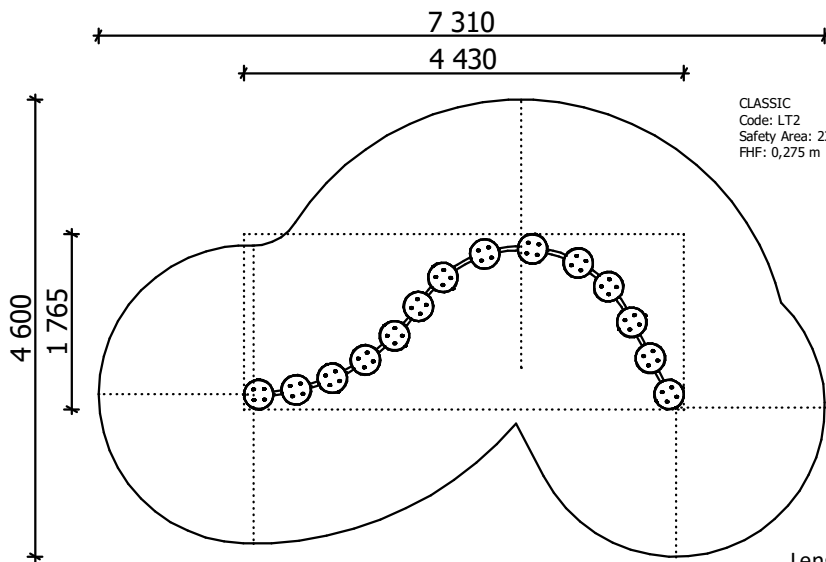

CLASSIC  
Code: LT2  
Safety Area: 23,92 m<sup>2</sup>  
FHF: 0,275 m

Length: **4 430 mm**  
Width: **1 765 mm**  
Height: **275 mm**


Length of safety area: **7 310 mm**  
Width of safety area: **4 600 mm**  
Required safety area: **23,92 m<sup>2</sup>**

(Install shock absorbing material according to EN 1176:2017)

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessible for maintenance.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.

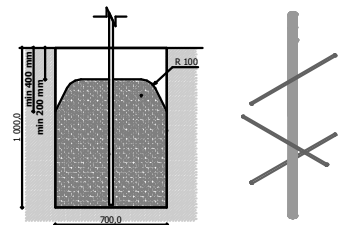

Transportation:

**1 (one) palette:**  
**2 500 x 1 140 x 500 mm**

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.