

Construction is made from glued wood, stainless and galvanized steel metal, HPL laminate.




**3**

children




**< 6**

age




**0,40 m**

height of fall



**15 kg**


(heaviest part)



**... kg**



**....**  
(without excavation and  
concreting)

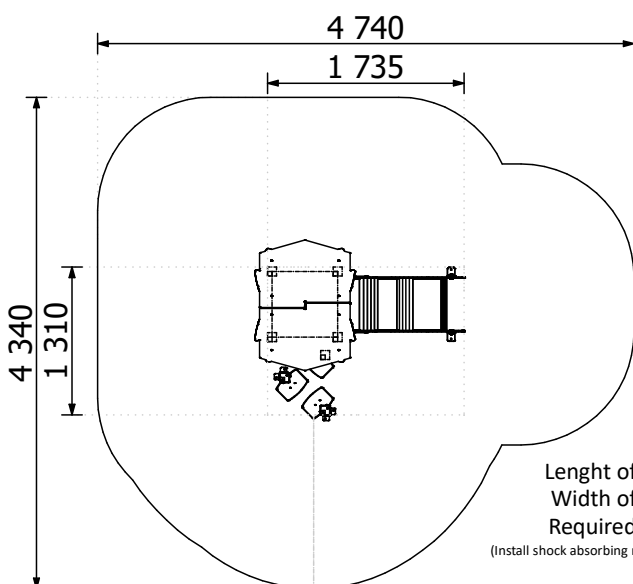


Length: **1 735 mm**  
Width: **1 310 mm**  
Height: **2 075 mm**

Length of safety area: **4 740 mm**  
Width of safety area: **4 340 mm**  
Required safety area: **16,14 m<sup>2</sup>**

(Install shock absorbing material according to  
EN 1176:2017)

**Do not place stainless steel slide  
directly to south!**


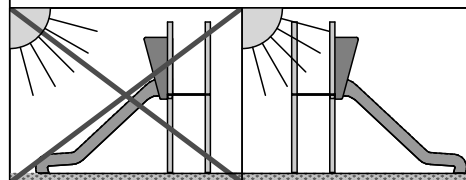


Foundation should be  
accessible for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

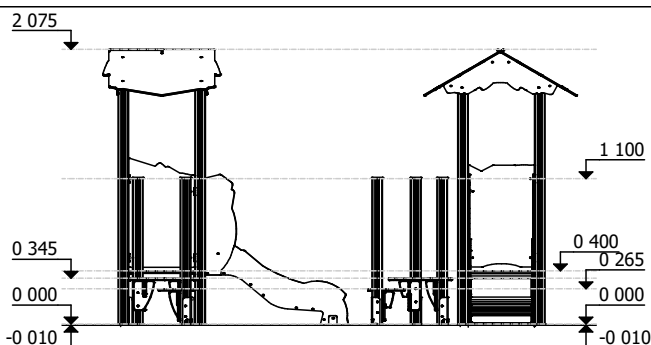

Transportation:

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1

Manufactured  
according:  
07.11.2019.

