
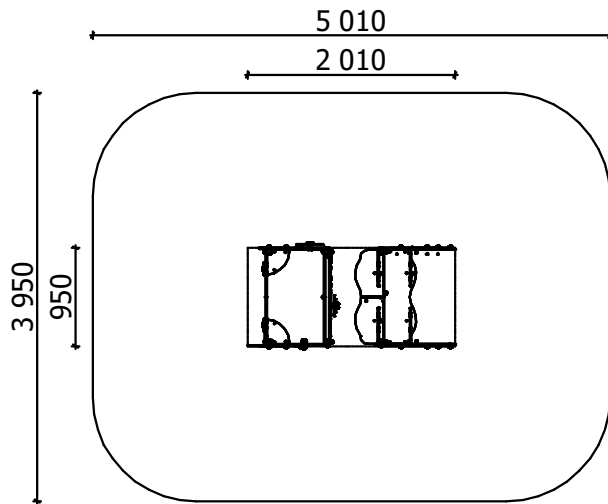


Construction is made from stainless and galvanized steel metal, and HPL details.

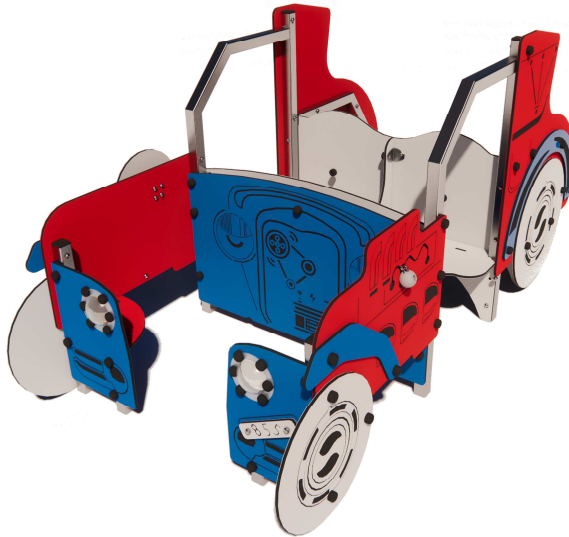

Length: **2 010 mm**
Width: **950 mm**
Height: **1 010 mm**

Length of safety area: **5 010 mm**
Width of safety area: **3 950 mm**
Required safety area: **18,94 m²**


(Install shock absorbing material according to EN 1176:2017)




7
children




< 6
age



0,30 m
height of fall



20 kg
(heaviest part)



... kg





....
(without excavation and concreting)

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

Foundation should be accessible for maintenance.

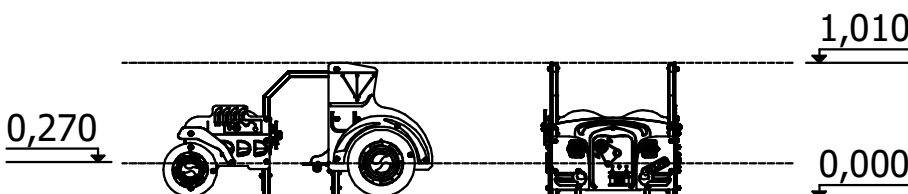

Transportation:

1 (one) palette:
2 000 x 1 000 x 1 000 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176:2017

Manufactured according:
07.11.2019.

