



Construction is made from stainless and galvanized steel metal, and HPL laminate.




1
children

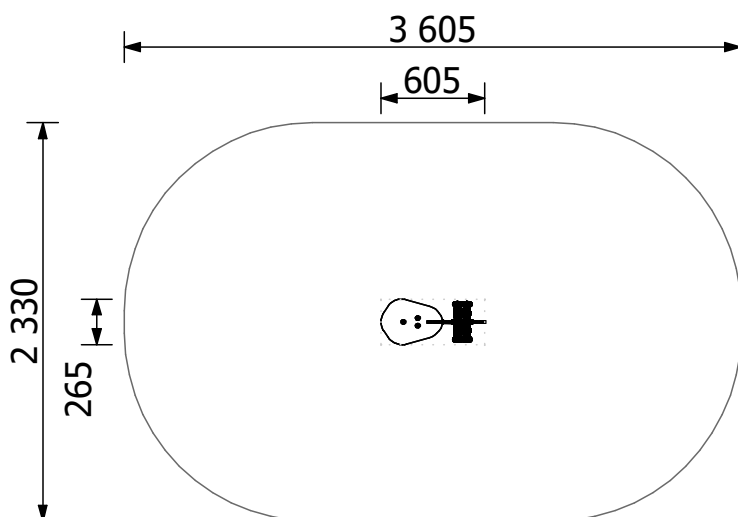


< 6
age



0,42 m
height of fall




8 kg
(heaviest part)



32 kg



1 h
(without excavation and
concreting)



200 x 200 x 910 mm
overall dimensions
of the largest part

Lenght:
Width:
Height:

605 mm
265 mm
900 mm

Lenght of safety area:
Width of safety area:
Required safety area:



3 605 mm
2 330 mm
7,37 m²

(Install shock absorbing material according to
EN 1176:2017)

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessible for maintenance.

Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.

Equipment safety checkings must be performend once in a week in high vandalism risk area. Maintanance is required once in every 3 months, depending on usage.

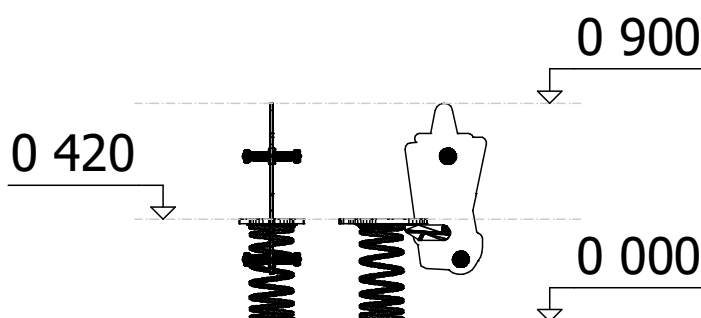

Transportation:

1 (one) package:
1 000 x 1 000 x 500 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.