

Construction is made from glued wood and galvanized steel, rope and chain details.



Length: **10 390 mm**
Width: **2 120 mm**
Height: **2 400 mm**


Length of safety area: **11 390 mm**
Width of safety area: **7 350 mm**
Required safety area: **83,52 / 76,32 m²**
(Install shock absorbing material according to EN 1176:2017)




> 6
children




< 14
age



1,18 m
height of fall




14 kg



... kg



(without excavation and concreting)

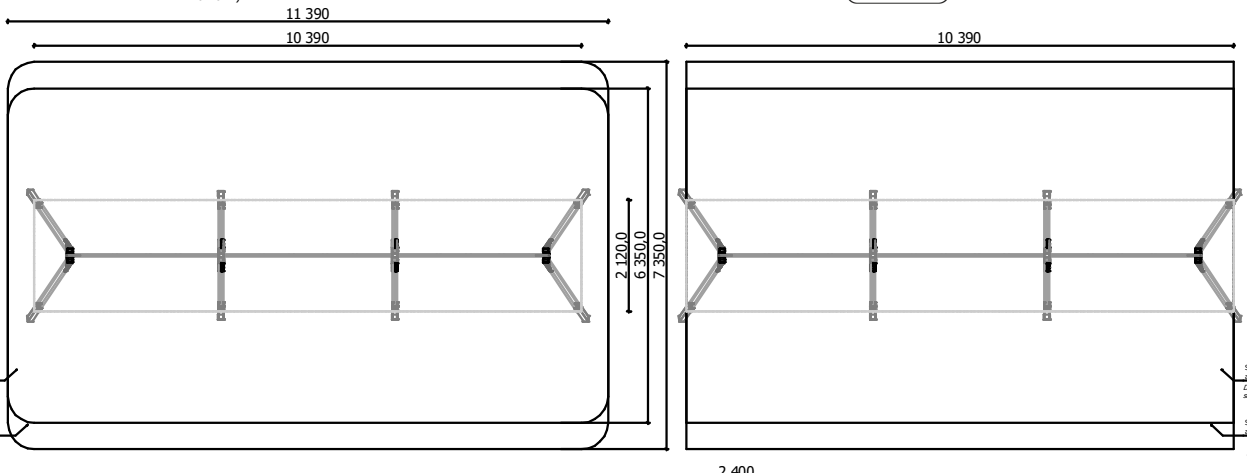

SAFETY AREA for a synthetic surface
DROŠĪBAS ZONE pār sintētiskā seguma

SAFETY AREA for a shock absorbing mat
DROŠĪBAS ZONE pār rīvējamā seguma

SAFETY AREA for a synthetic surface
DROŠĪBAS ZONE pār sintētiskā seguma


SAFETY AREA for a shock absorbing mat
DROŠĪBAS ZONE pār rīvējamā seguma

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.



Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

In the direction of the swing there must be an extra 500 mm free area of any obstacles!

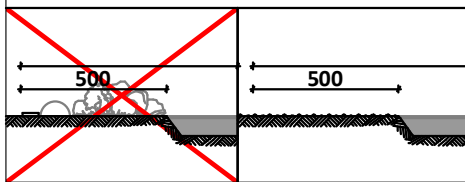

Foundation should be accessible for maintenance.

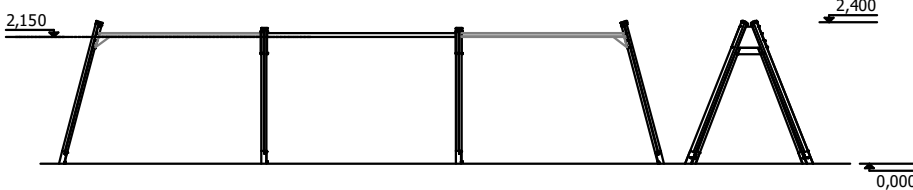

Transportation:

1 (one) palette:
2 600 x 1 000 x 400 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.