


Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.




13
children




> 6
age



1,90 m
height of fall




85 kg
(heaviest part)



590 kg



7 h
(without excavation and concreting)

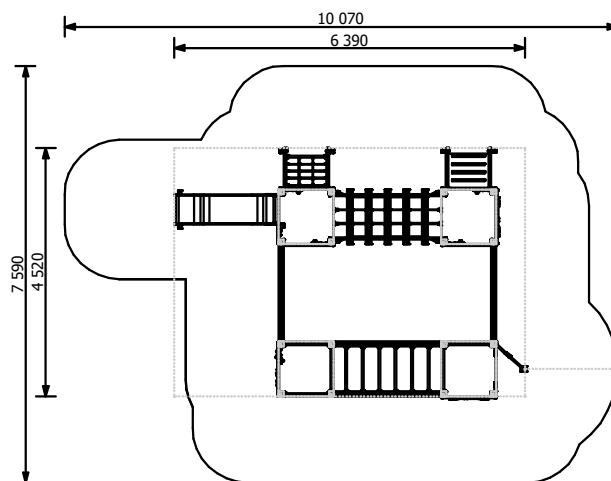

Length: **6 390 mm**
Width: **4 520 mm**
Height: **3 000 mm**


Length of safety area: **10 070 mm**
Width of safety area: **7 590 mm**
Required safety area: **58,69 m²**

(Install shock absorbing material according to
EN 1176-1)

Available color's palette



Do not place stainless steel slide directly to south!

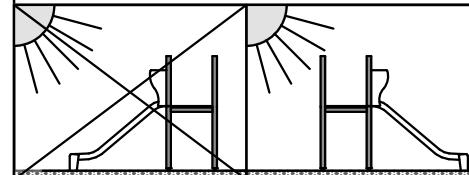


Foundation should be
accessible for maintenance.


Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.



Transportation:

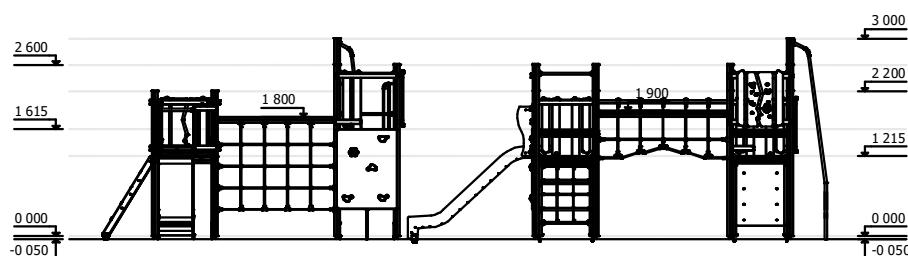

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1

Manufactured
according:
07.11.2019.

