


Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.

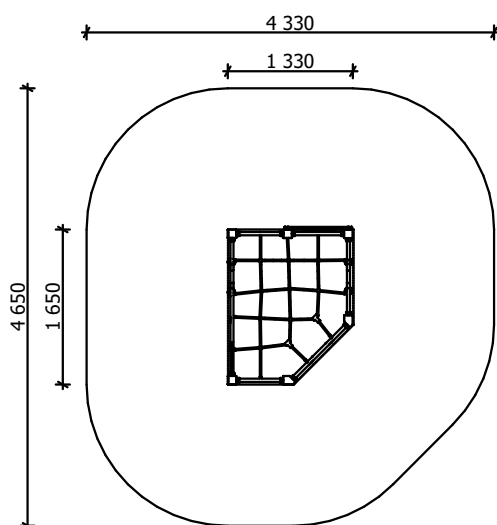

Length: **1 330 mm**

Width: **1 650 mm**

Height: **1 500 mm**

Lenght of safety area: **4 330 mm**


Width of safety area: **4 650 mm**

Required safety area: **17,42 m²**


(Install shock absorbing material according to EN 1176:2017)




8
children




3-14
age



1,385
height of fall




25 kg
(heaviest part)



150 kg



6h
(without excavation
and concreting)



1500 x 90 x 90 mm
Largest component

Available color's palette





Foundation should be
accessable for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

For any playground equipment with a free fall height exceeding 600 mm, or equipment that exerts forced movement on the user's body, the entire impact area must be equipped with a certified impact-attenuating surface.

Equipment safety checkings must be performed once in a week in high vandalism risk area. Maintenance is required once in every 3 months, depending on usage.

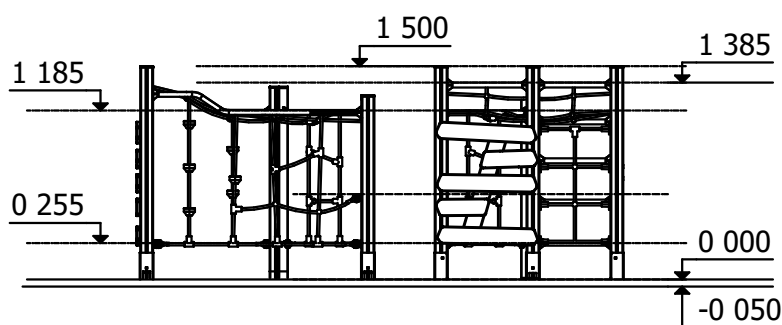

Transportation:

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1:2017

Manufactured
according:

07.11.2019

