



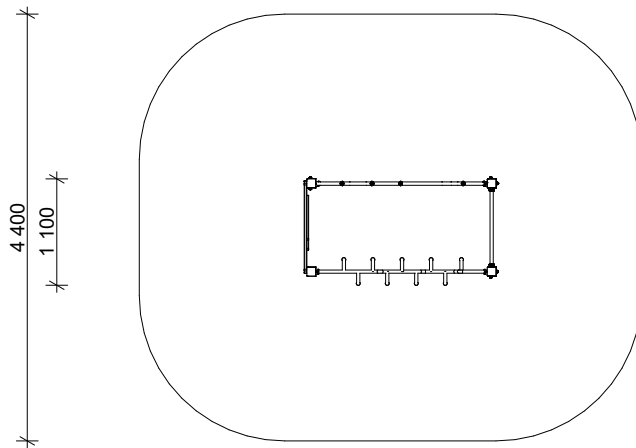

Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.




Length: **1 980 mm**  
Width: **1 100 mm**  
Height: **1 910 mm**


Length of safety area: **5 180 mm**  
Width of safety area: **4 400 mm**  
Required safety area: **20,85 m<sup>2</sup>**  
(Install shock absorbing material according to EN 1176:2017)




**4** children




**3-14** age



**1,8** height of fall




**30 kg** (heaviest part)



**155 kg**




**4h** (without excavation and concreting)



**1900x 90 x 90 mm** Largest component

Available color's palette




Foundation should be accessible for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

**For any playground equipment with a free fall height exceeding 600 mm, or equipment that exerts forced movement on the user's body, the entire impact area must be equipped with a certified impact-attenuating surface.**


Equipment safety checkings must be performed once in a week in high vandalism risk area. Maintenance is required once in every 3 months, depending on usage.



Transportation:

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

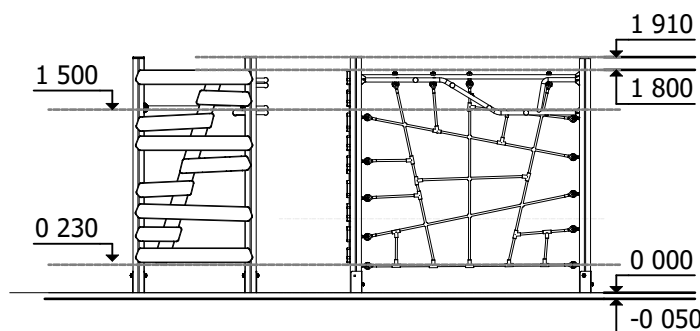

According to EN 1176-1:2017

Manufactured according:

