


Construction is made from glued wood, galvanized steel metal and plastic and rubber details.




Length: 3 250 mm
Width: 1 760 mm
Height: 2 190 mm


Length of safety area: 3 070 mm
Width of safety area: 7 240 mm
Required safety area: 22,26 m²
(Install shock absorbing material according to EN 1176-1)

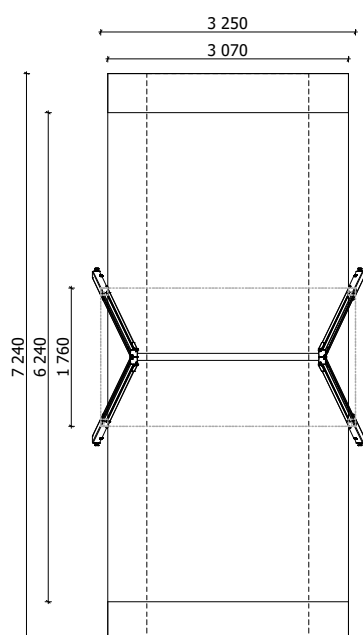


< 3
children




< 14
age



1,16 m
height of fall




20,31 kg
(heaviest part)



86,05 kg



4,5 h
(without excavation and concreting)




358x230x2450 mm
overall dimensions
of the largest part

Available color's palette





In the direction of the swing there must be an extra 500 mm free area of any obstacles!

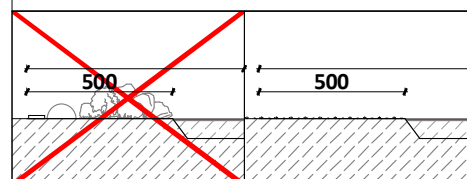

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessible for maintenance.

Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.

Equipment safety checkings must be performed once in a week in high vandalism risk area. Maintenance is required once in every 3 months, depending on usage.

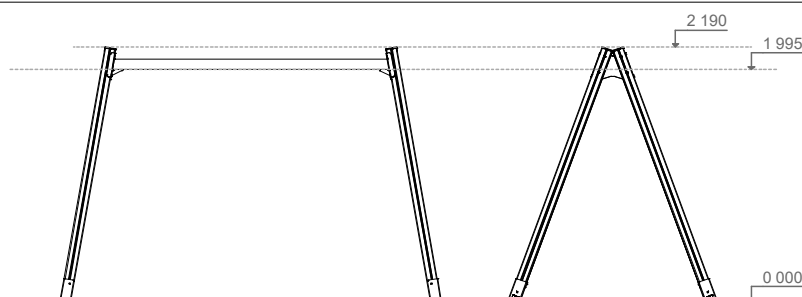

According to EN 1176-1,2

Transportation:

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

Manufactured
according:
07.11.2019.

