

Construction is made from glued wood, stainless and galvanized steel metal, HPL laminate.



Lenght: **6 930 mm**
Width: **2 010 mm**
Height: **2 540 mm**


Lenght of safety area: **8 930 mm**
Width of safety area: **7 830 mm**
Required safety area: **54,3 / 69 m²**
(Install shock absorbing material according to EN 1176-1)

**4 - 7**


children

**<14**


age

**1,36 m**


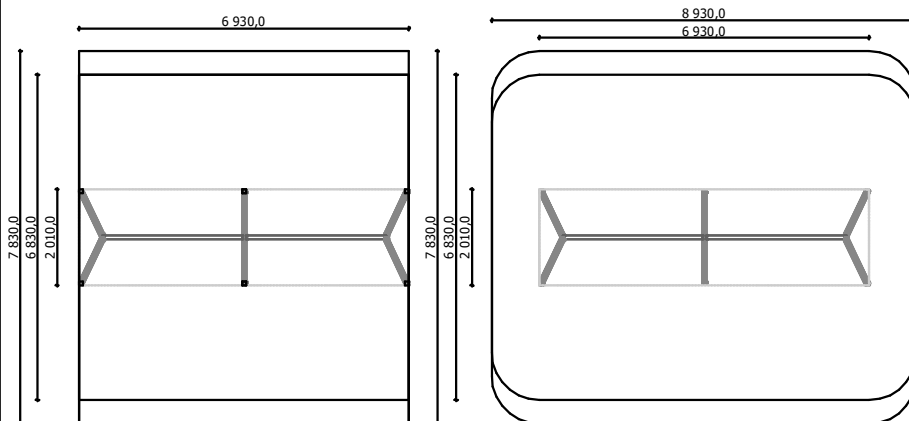
height of fall

**10 kg**

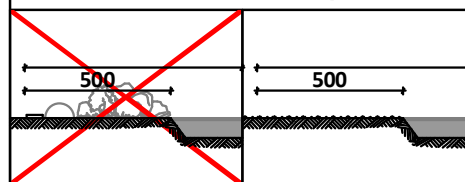
(heaviest part)

**260 kg****5 h**

(without excavation and concreting)

**80 x 80 x 2700 mm**overall dimensions
of the largest part

In the direction of the swing there must be an extra 500 mm free area of any obstacles!


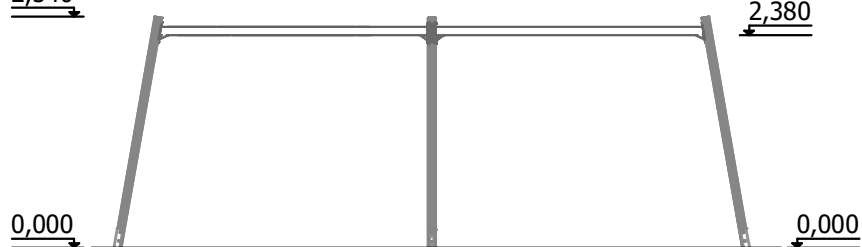


Foundation should be accessible for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessible for maintenance.

Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.

Equipment safety checkings must be performed once in a week in high vandalism risk area. Maintenance is required once in every 3 months, depending on usage.

**2,540****2,380****0,000****0,000**

Transportation:

2 800 x 1 000 x 600 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1

Manufactured
according:
07.11.2019.

