NA026

PRODUCT DATA SHEET

Jūrmalas Mežaparki Ltd.
1 Garkalnes street, Jurmala
+371 299 006 03, www.jmp.lv

Construction is made from glued wood, stainless and galvanized steel metal, plywood, plastic and HPL laminate details.

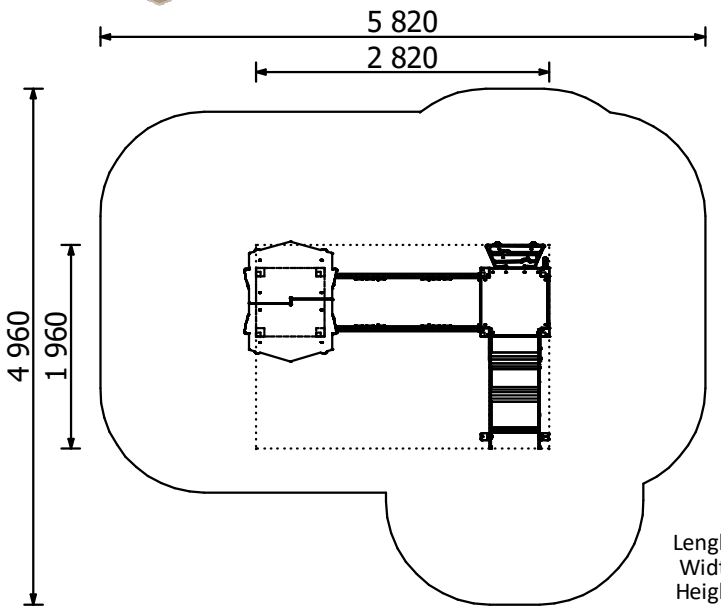

MAX **5** children

6 AGE 14 **< 6** age

2 m / 1 m **0,40** height of fall

kg **29,41 kg** (heaviest part)

kg + **189 kg**

h **4 h** (without excavation and concreting)

2 m / 1 m 660 x 1500 x 78 mm overall dimensions of the largest part

Lenght: 2 820 mm
Width: 1 960 mm
Height: 1 995 mm / 2 075 mm

Lenght of safety area: 5 820 mm
Width of safety area: 4 960 mm
Required safety area: 23,01 m²
(Install shock absorbing material according to EN 1176-1)

Do not place stainless steel slide directly to south!

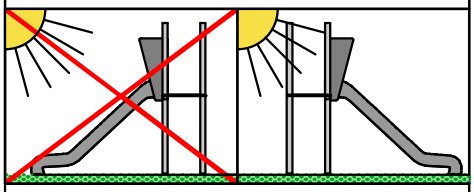

Foundation should be accessable for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area. Foundation should be accessable for maintenance.

Playground equipment with free height of fall of more than 600 mm and/or equipment causing a force movement on the body of the user, shall be impact attenuating surfacing over the entire impact area.

Equipment safety checkings must be performend once in a week in high vandalism risk area.
Maintainance is required once in every 3 months, depending on usage.



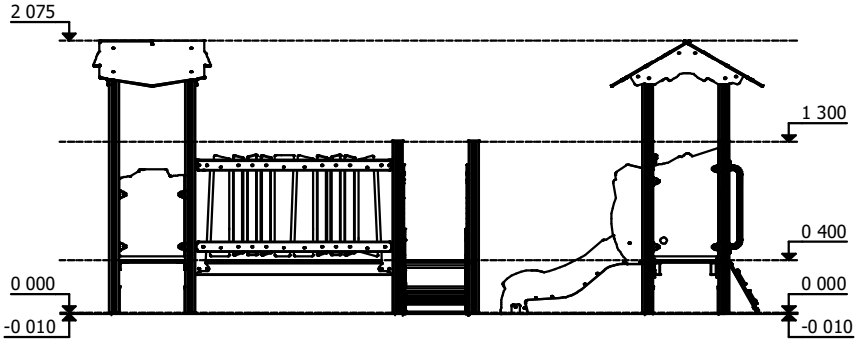

Transportation:

Spare parts:
All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1

Manufactured according:
07.11.2019.

ISO 9001 BUREAU VERITAS Certification