


Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.




9
children



< 14
age



1,80 m
height of fall




65 kg
(heaviest part)



360 kg



5 h
(without excavation and concreting)

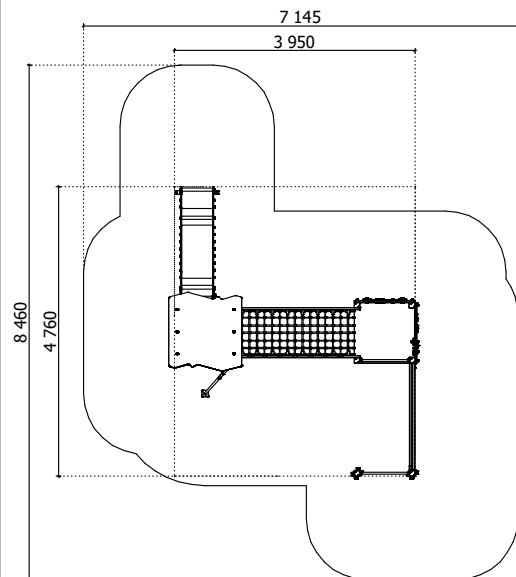

Length: **3 950 mm**
Width: **4 760 mm**
Height: **2 690 mm**


Length of safety area: **7 145 mm**
Width of safety area: **8 460 mm**
Required safety area: **41,36 m²**

(Install shock absorbing material according to
EN 1176:2017)

Available color's palette



Do not place stainless steel slide
directly to south!

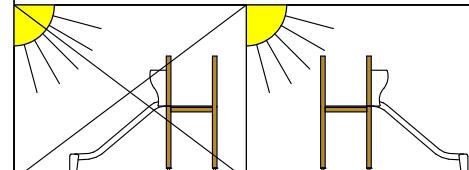


Foundation should be
accessible for maintenance.


Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.

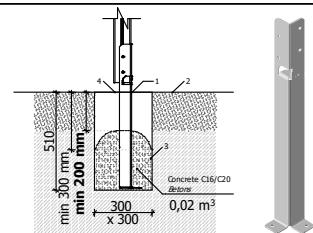

Transportation:

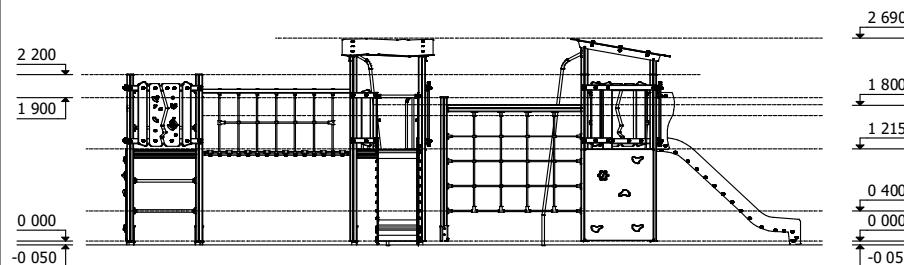

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176-1:2017

Manufactured
according:
07.11.2019.

